



# BSS-H40-D20-HE

## HALL EFFECT SPEED SENSOR

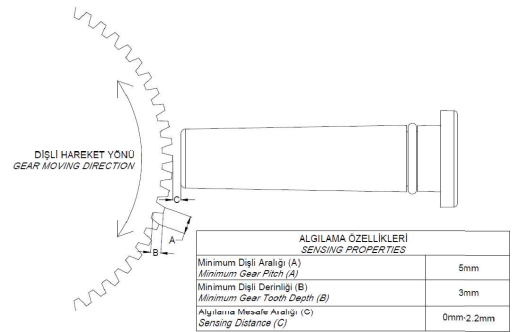

Operating Voltage	7V-32V
Operating Temperature	-40°C / +120°C
Sensor Type	Dual Hall Effect
Sensing Frequency Range	0Hz-10KHz
Minumum Gear Pitch	5mm
Minumum Gear Tooth Depth	3mm
Sensing Distance Range	0mm-2.2mm
Ingress Protection	IP67
Other Features	Reverse Voltage Protection
	High Current Protection
	Auto-Gain Technology

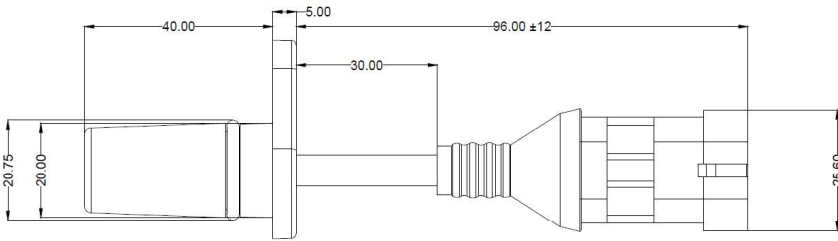

**BESTAŞ ELEKTRONİK – OPTİK SAN. ve TİC. A.Ş.**

Maltepe İstanbul


Tel: 0216 427 10 20 (Pbx) Faks: 0216 427 11 40

www.bestas.com.tr



bestas@bestas.com.tr

# BSS-H77.5-D20-HE

## HALL EFFECT SPEED SENSOR

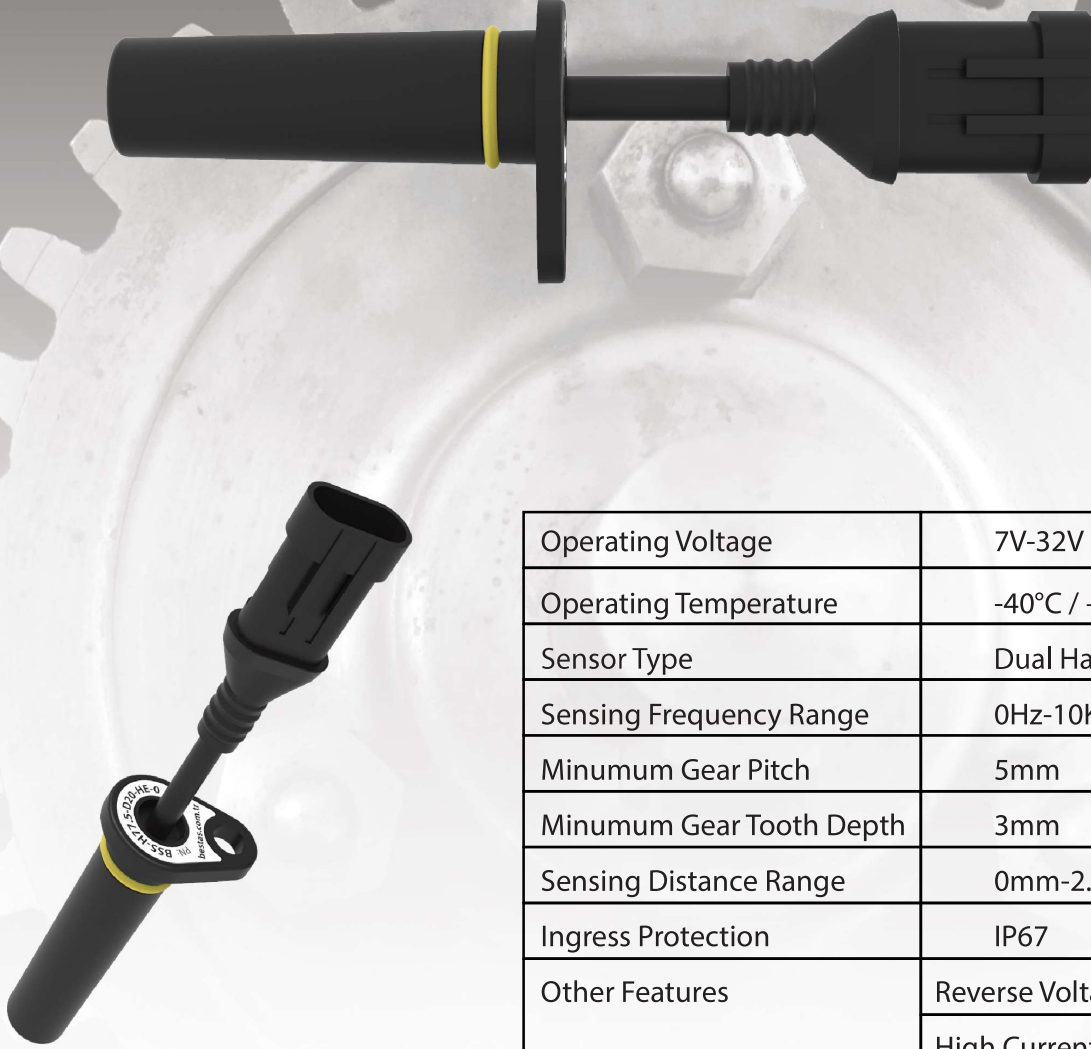

Operating Voltage	7V-32V
Operating Temperature	-40°C / +120°C
Sensor Type	Dual Hall Effect
Sensing Frequency Range	0Hz-10KHz
Minumum Gear Pitch	5mm
Minumum Gear Tooth Depth	3mm
Sensing Distance Range	0mm-2.2mm
Ingress Protection	IP67
Other Features	Reverse Voltage Protection
	High Current Protection
	Auto-Gain Technology

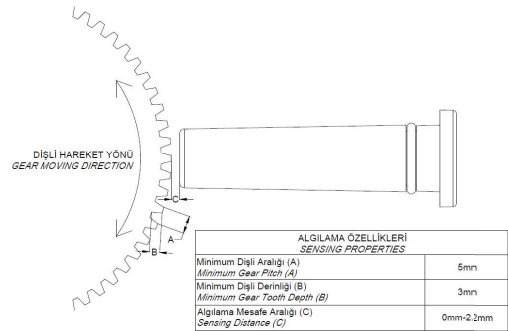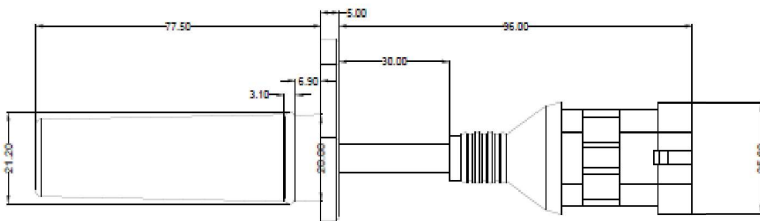

BESTAŞ ELEKTRONİK – OPTİK SAN. ve TİC. A.Ş.

Maltepe İstanbul

Tel: 0216 427 10 20 (Pbx) Faks: 0216 427 11 40

www.bestas.com.tr

bestas@bestas.com.tr